



CUMMINS INC.
 Charleston, SC 29405
 Marine Performance Curves

Basic Engine Model:

QSM11-DM

Curve Number:

D(M)-20038

Engine Configuration:

D353021MX03

CPL Code:

8590

Date:

8-Sep-15


Displacement: **10.8 liter** [660.00 in³] kW [hp] @ rpm
 Bore: **125 mm** [4.92 in] Advertised Power: **265[355]@1800**
 Stroke: **147 mm** [5.79 in] Aspiration: **Turbocharged Aftercooled**
 Fuel System: **CELECT** Exhaust Type: **Wet**
 Cylinders: **6**

CERTIFIED: This marine diesel engine complies with or is certified to the:
 IMO - NOx requirements of the International Maritime Organization (IMO), MARPOL 73/78 Annex VI, Regulation 13

Engine Speed	Overload Capacity		Prime Power		Continuous Power	
	kWm	BHP	kWm	BHP	kWm	BHP
RPM						
1800	292	391	265	355	212	284

Engine Performance Data @ 1800 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	BHP	kg/ kW-h	Lb/ BHP-h	Liter/ hour	U.S. Gal/ hour
10% OVERLOAD CAPACITY						
110%	292	391	0.210	0.346	72.1	19.0
PRIME POWER						
100%	265	355	0.210	0.345	65.4	17.3
75%	199	266	0.211	0.348	49.4	13.1
50%	132	178	0.223	0.367	34.7	9.2
25%	66	89	0.260	0.428	20.3	5.4
10%	26	36	0.342	0.563	10.7	2.8
CONTINUOUS POWER						
80%	212	284	0.212	0.348	53	14

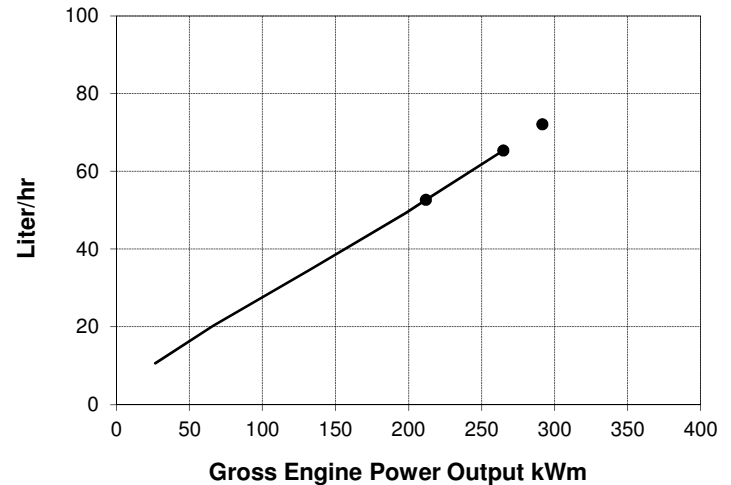

Rating Conditions: Ratings are in accordance with ISO 15550 and ISO 8528-5 reference conditions; air pressure at 100 kPa (29.61 in Hg), air temperature 25°C (77°F), and 30% relative humidity. The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/liter (7.001 lb/U.S. gal).

Power output curves are based on the engine operating with fuel system, water pump, and lubricating oil pump; not included are battery charging alternator, fan, optional equipment, and driven components.

Values from engine control modules and displayed on instrument panels are not absolute. Tolerance varies, but is generally less than +/- 5% when operating within 30% of rated power.

Unless otherwise specified, tolerance on all values is +/-5%.

Prime Power

Engines with this rating are available for an unlimited number of hours per year in variable load applications. Variable load is not to exceed a 80 percent average of the rated power. A 10 percent overload capability is available for a period of one hour within a 12 hour period of operation. Total operating time at the 10 percent overload power shall not exceed 25 hours per year. This power rating follows ISO 8528 guidelines.

TECHNICAL DATA DEPT.

John M. Monahan
CHIEF ENGINEER

Auxiliary Marine Engine Performance Data

Curve No. **D(M)-20038**
DS : **DS-3021**
CPL : **8590**
DATE: **8-Sep-15**

General Engine Data

Engine Model	QSM11-DM			
Rating Type	Prime Power		Overload	
Rated Engine Power	265	[355]	292	[391]
Governed Engine Speed	1800			
Rated HP Production Tolerance	±5%			
Rated Engine Torque	1404	[1036]	1547	[1141]
Low Idle Speed Range				
Minimum	600			
Maximum	900			
Maximum Torque Capacity from Front of Crank ²	813	[600]		
Brake Mean Effective Pressure	1632	[237]	1797	[261]
Compression Ratio	15.9:1			
Piston Speed	9	[1737]		
Firing Order	1-5-3-6-2-4			
Friction Power	28	[38]		
Steady State Stability Band at Constant Load	TBD			
Weight Dry - Engine Only	1118	[2464]		
Weight Dry - Engine With Heat Exchanger	1184	[2610]		

Noise and Vibration

Average Noise Level - Top	(Idle).....	dBA @ 1m	80	
	(Rated).....	dBA @ 1m	95	
Average Noise Level - Right Side	(Idle).....	dBA @ 1m	80	
	(Rated).....	dBA @ 1m	95	
Average Noise Level - Left Side	(Idle).....	dBA @ 1m	80	
	(Rated).....	dBA @ 1m	95	

Fuel System¹

Approximate Fuel Flow to Pump	219.6	[58.0]	219.6	[58.0]
Maximum Allowable Fuel Supply to Pump Temperature	60	[140]	60	[140]
Approximate Fuel Flow Return to Tank	154.2	[40.7]	147.5	[39.0]
Approximate Fuel Return to Tank Temperature	71	[160]	71	[160]
Maximum Heat Rejection to Drain Fuel	3	[164]	3	[168]
Fuel Rail Pressure	1100	[160]	1100	[160]
Average Fuel Consumption- Emissions ISO 8178 D2 Test Cycle.....	33.7	[8.9]		

Air System¹

Intake Manifold Pressure	163	[48]	184	[54]
Intake Air Flow	350	[742]	374	[793]
Heat Rejection to Ambient	24	[1340]	26	[1456]

Exhaust System¹

Exhaust Gas Flow	748	[1585]	807	[1709]
Exhaust Gas Temperature (Turbine Out)	381	[717]	391	[735]
Exhaust Gas Temperature (Manifold)	544	[1011]	566	[1050]
Heat Rejection to Exhaust	99	[5611]	108	[6172]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

- ¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.
- ² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.
- ³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.
- ⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

CUMMINS ENGINE COMPANY, INC
COLUMBUS, INDIANA

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<http://marine.cummins.com>

Auxiliary Marine Engine Performance Data

Curve No. D(M)-20038
 DS : DS-3021
 CPL : 8590
 DATE: 8-Sep-15

Emissions (in accordance with ISO 8178 Cycle D2)

NOx (Oxides of Nitrogen)	g/kw·hr [g/bhp·hr]	6.434	[4.798]
HC (Hydrocarbons)	g/kw·hr [g/bhp·hr]	0.344	[0.257]
CO (Carbon Monoxide)	g/kw·hr [g/bhp·hr]	0.863	[0.644]
PM (Particulate Matter)	g/kw·hr [g/bhp·hr]	0.189	[0.141]

Emissions (in accordance with ISO 8178 Cycle E2)

NOx (Oxides of Nitrogen)	g/kw·hr [g/bhp·hr]	6.263	[4.670]
HC (Hydrocarbons)	g/kw·hr [g/bhp·hr]	0.282	[0.210]
CO (Carbon Monoxide)	g/kw·hr [g/bhp·hr]	0.456	[0.340]
PM (Particulate Matter)	g/kw·hr [g/bhp·hr]	0.174	[0.130]

Cooling System¹

Sea Water Pump Specifications	MAB 0.08.17-07/16/2001		
Pressure Cap Rating (With Heat Exchanger Option)	kPa [psi]	103	[15]

Singe Loop LTA

Coolant Flow to Main Cooler (with open thermostat).....	l/min [gal/min]	175	[46.2]		
Standard Thermostat Operating Range	Start to open.....	66	[150]		
	Full open.....	80	[175]		
Heat Rejection to Engine Coolant ³	kW [Btu/min]	235	[13400]	259	[14750]
Maximum Coolant Inlet Temperature from Keel Cooler.....	°C [°F]	49	[120]		

Engines with Radiator Cooling

Coolant Flow to Radiator (Blocked open thermostat).....	l/min [gal/min]	175	[46.2]		
Standard Thermostat Operating Range	Start to open.....	66	[150]		
	Full open.....	80	[175]		
Heat Rejection to Engine Coolant ³	kW [Btu/min]	235	[13400]	259	[14750]
Maximum Coolant Inlet Temperature from Radiator					
For Radiator @ 35° C [95° F] Ambient Air.....	°C [°F]	54	[130]		
For Radiator @ 50° C [122° F] Ambient Air.....	°C [°F]	68	[155]		

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

- ¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.
- ² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.
- ³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.
- ⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

CUMMINS ENGINE COMPANY, INC
 COLUMBUS, INDIANA

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<http://marine.cummins.com>