



## Specification sheet

# Fire pump drive engine

## CFP60E-F40



### Description

**Engine series** - Cummins QSK60 Series

**Exhaust emissions** - EPA Tier 2

The CFP60E has higher torque, shorter service times, longer maintenance intervals, and increased fuel economy. Customers request this model due to the durability and compactness of the design which can be configured to meet most applications.

### Features


**Quality Engineering** - The CFP60E-F40 is not equipped with a redundant set of ECMs. The CFP60E complies with the NFPA 20 installation standard except for the requirements regarding a redundant ECM.

**Control system** - The industry-leading, state-of-the-art Fire Pump Digital Panel (FPDP) provides total fire pump drive engine system integration and intuitive operation, including:

- Color touchscreen;
- Dual microprocessors for critical signal redundancy;
- Standard J1939 parameter and Cummins fault code display;
- Engine idling;
- Electronic Control Module (ECM) self-diagnosis; and
- Optional Modbus field server remote messaging capability.

**Warranty and service** - Our models are backed by a comprehensive warranty and worldwide distributor network.

| Operating speed (RPM) | Ratings in HP (kW) |        |      |        |
|-----------------------|--------------------|--------|------|--------|
|                       | 1500               |        | 1800 |        |
| CFP60E-F40            | 2120               | (1580) | 2656 | (1980) |

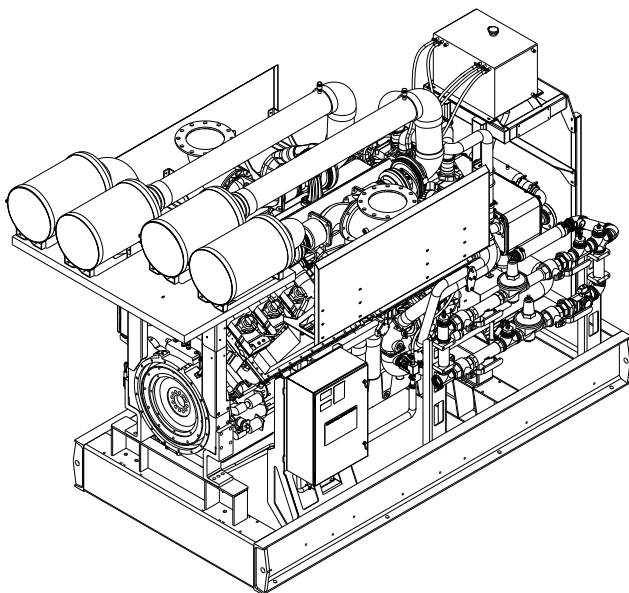

### General engine data

|   |  |
|---|--|
| Engine type   | 4 Cycle; Vee, 16 Cylinder                                  |
| Aspiration  | Turbocharged/ 2 Pump - 2 Loop Low-temperature after-cooled |
| Bore and stroke                                       | 6.26 x 7.48 in. (159 x 190mm)                              |
| Displacement  | 3673 in <sup>3</sup> (60.2 L)                              |
| Rotation  | Counter-clockwise from flywheel end                        |
| Compression ratio                                     | 14.5:1   |
| Valves per cylinder                                   | Intake - 2 Exhaust - 2                                     |
| Fuel system   | Cummins MCRC   |
| Maximum allowable bending moment @ rear face of block | 7634 lb.-ft. (10350 N-m)                                   |
| Estimated wet weight*                                 | 23,300 lbs. (10568 kg)                                     |

\* Weight includes engine, cooling loop, heat exchanger, dual Electronic Control Modules (ECMs), Fire Pump Digital Panel (FPDP), standard air cleaner, standard exhaust flex, and all fluids.

| Equipment                                  | Standard  | Optional  |
|--|---|---|
| Air cleaner                                | Direct-mounted, disposable indoor service   | Heavy-duty, two-stage with replaceable elements                                       |
| Alternator                                 | 24V-DC, 55 amps; includes belt guard  | N/A   |
| Cooling loop (maximum pressure of 200 PSI) | 2.5" diameter for fresh water; includes alarm sensors                               | Cu Ni construction available for sea water applications                               |
| Cooling system                             | 40 PSI with flange connections, plate type  | Radiator  |
| Engine heater                              | (2) 240V-AC, 6420 watts   | (2) 480V-AC, 6420 watts   |
| Exhaust protection                         | Metal guards on manifolds and turbocharger  | N/A   |
| Exhaust flex connection                    | Steel, flanged  | Stainless steel flex, NPT   |
| Flywheel power take-off                    | Flywheel  | Driveshaft system   |
| Fuel connections                           | Fire-resistant flexible supply and return lines                                     | N/A   |
| Fuel filter                                | (2) Cartridge primary, (3) spin-on secondary  | N/A   |
| Governor, speed                            | Constant speed, electronic  | N/A   |
| Fire pump digital panel (FPDP)             | 7" color touchscreen; enclosure rated as Type 2/Type 4X; Imperial and metric values | Optional 316SS construction; custom gauges with digital panel expansion module (DPEM) |
| Lube oil cooler                            | Engine-water-cooled, plate type   | N/A   |
| Lube oil filter                            | Full-flow with by-pass valve  | N/A   |
| Lube oil pump                              | Gear-driven   | N/A   |
| Manual start controls                      | On FPDP and/or contactors   | N/A   |
| Overspeed controls                         | Electronic with reset and test on FPDP  | N/A   |
| Starter                                    | 24V-DC  | 24V-DC/pneumatic*/hydraulic*  |

\*Only approved as a secondary starter.

## Air induction system

|   |   |
|---|---|
| Maximum temperature rise between ambient air and engine air inlet | 20 °F (11.1 °C)                                   |
| Maximum inlet restriction with dirty filter                       | 25 in. H <sub>2</sub> O (635 mm H <sub>2</sub> O) |
| Recommended air cleaner primary element - (standard)              | (4) Cummins Filtration AF25593                    |
| Recommended air cleaner primary element - (heavy duty)            | (4) Cummins Filtration AF899                      |
| Recommended air cleaner secondary element - (heavy duty)          | (4) Cummins Filtration AF880                      |


## Lubrication system

|                                  |                               |
|----------------------------------|-------------------------------|
| Oil pressure range at rated      | 60-70 PSI (414-483 kPa)       |
| Oil capacity of pan (high - low) | 276-244 qt. (261-231 L)       |
| Total system capacity            | 74 gal. (280 L)               |
| Recommended lube oil filter      | (4) Cummins Filtration LF9050 |

## Cooling system\*

|   |                               |
|---|-------------------------------|
| Raw water working pressure range at heat exchanger                | 29 PSI (200 kPa) MAX          |
| Recommended minimum water supply pipe size to heat exchanger      | 2.5 in. (63.5 mm)             |
| Recommended minimum water discharge pipe size from heat exchanger | 3.00 in. (76.2 mm)            |
| Coolant water capacity (engine only)                              | 42 gal. (159 L)               |
| Standard thermostat - type  | Modulating                    |
| Standard thermostat - range                                       | 180-200 °F (82-93 °C)         |
| Normal Operating Temperature                                      | 180-212 °F (82-100 °C)        |
| Minimum raw water flow:   |                               |
| - with water temperatures to 60 °F (16 °C)                        | 135 GPM (8.52 L/sec)          |
| - with water temperatures to 80 °F (27 °C)                        | 220 GPM (13.88 L/sec)         |
| - with water temperatures to 100 °F (38 °C)                       | 425 GPM (26.81 L/sec)         |
| Recommended cooling water filter                                  | (2) Cummins Filtration WF2075 |

\* A jacket water heater is mandatory on this engine. The recommended heater wattage for the two heaters is 4000 down to 40 °F (4 °C)

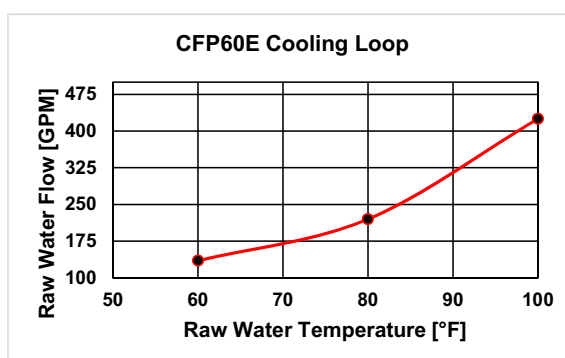

## Exhaust system

|  |                                     |
|--|-------------------------------------|
| Maximum allowable back pressure by complete exhaust system | 27.2 in. H <sub>2</sub> O (6.8 kPa) |
| Exhaust pipe size normally acceptable                      | 9.1 in. (231 mm)                    |

**Noise emissions** - The noise emission values are estimated sound pressure levels at 3.3 ft. (1 m).

|            |         |
|------------|---------|
| Top        | 129 dBa |
| Right side | 129 dBa |
| Left side  | 129 dBa |
| Front      | 129 dBa |
| Exhaust    | 129 dBa |

## Fuel supply/drain system

| Operating speed in RPM    | 1500  |       | 1800  |       |
|---------------------------|-------|-------|-------|-------|
| Fuel rate - gal/hr (L/hr) | 106.9 | (405) | 133.9 | (507) |

|  |  |
|--|--|
| Fuel type  | No. 2 diesel only                                  |
| Minimum supply line size                                   | 1 1/16 in. (26.99 mm)                              |
| Minimum drain line size                                    | 1 1/16 in. (26.99 mm)                              |
| Maximum fuel line length between supply tank and fuel pump | 40 ft. (12 m)                                      |
| Maximum fuel inlet pressure                                | 5 PSI (34 kPa)                                     |
| Recommended fuel filter - primary                          | (3) Cummins Filtration FF5782NN                    |
| Recommended fuel filter - secondary                        | (2) Cummins Filtration FS19763                     |
| Maximum restriction @ lift pump-inlet - with clean filter  | 5 in. Hg (127 mm Hg)                               |
| Maximum restriction @ lift pump-inlet - with dirty filter  | 9 in. Hg (229 mm Hg)                               |
| Maximum return line restriction - without check valves     | 10 in. Hg (254 mm Hg)                              |
| Minimum fuel tank vent capability                          | 127.1 ft <sup>3</sup> /hr (3.6 m <sup>3</sup> /hr) |
| Maximum fuel temperature @ lift pump inlet                 | 160 °F (71 °C)                                     |

## Starting and electrical system

|  |              |
|--|--------------|
| Minimum recommended battery capacity - cold soak at 0 °F (-18 °C) or above | 24V          |
| Engine only - cold cranking amperes  | 1800 CCA*    |
| Engine only - reserve capacity   | 640 minutes* |

\*Based on FM requirement for a minimum of 900 CCA and 430 reserve capacity minutes

|  |            |
|--|------------|
| Battery cable size - minimum of 2/0 AWG and maximum cable length not to exceed 6 ft. (1.5 m) | 24V        |
| Maximum resistance of starting circuit   | 0.002 Ohms |
| Typical cranking speed   | 150 RPM    |
| Alternator (standard), internally regulated  | 55 amps    |


## Operating conditions

| Operating speed in RPM                                | 1500  |        | 1800  |        |
|---|-------|--------|-------|--------|
| Output - BHP (kW)                                     | 2120  | (1580) | 2656  | (1980) |
| Ventilation air required - CFM (litre/sec)            | 4636  | (2188) | 6658  | (3142) |
| Exhaust gas flow - CFM (litre/sec)                    | 11465 | (5411) | 15074 | (7114) |
| Exhaust gas temperature - °F (°C)                     | 912   | (489)  | 795   | (424)  |
| Heat rejection to jacket coolant - BTU/min. (kW)      | 29237 | (514)  | 34370 | (604)  |
| Heat rejection to aftercooler coolant - BTU/min. (kW) | 23058 | (405)  | 38946 | (685)  |
| Heat rejection to ambient - BTU/min. (kW)             | 9090  | (160)  | 11385 | (201)  |

## Engine performance curve for CFP60E-F40


**Torque Output**

| RPM  | lb-ft | N-m   |
|------|-------|-------|
| 1500 | 7423  | 10064 |
| 1800 | 7750  | 10507 |

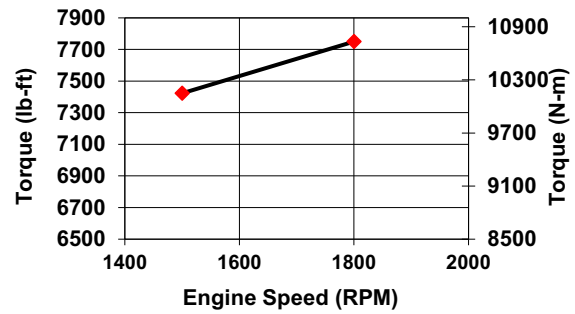

**Horsepower Output**

| RPM  | BHP  | kW   |
|------|------|------|
| 1500 | 2120 | 1580 |
| 1800 | 2656 | 1980 |

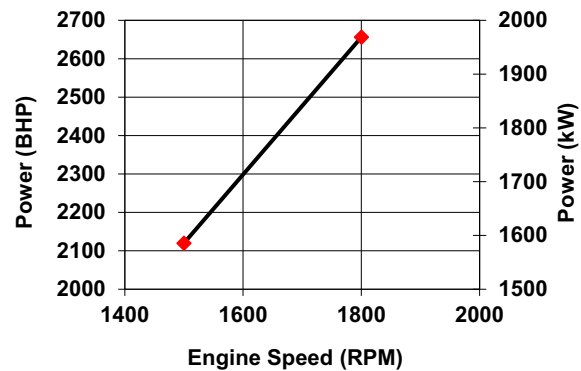

All data is based on the engine operating with a fuel system, water pump, lubricating oil pump, air cleaner, and alternator. The fan, optional equipment, and driven components are not included. Data is based on operation at SAE standard J1349 conditions of 300 ft. (91.4 m) altitude, 29.61 in. (752 mm) Hg dry barometer, and 77 °F (25 °C) intake air temperature, using No.2 diesel fuel only.

|  |                  |
|--|------------------|
| Altitude above which output should be limited*:              | 300 ft. (91.4 m) |
| Correction factor per 1000 ft. (305 m) above altitude limit: | 3%               |
| Temperature above which output should be limited:            | 77 °F (25 °C)    |
| Correction factor per 10 °F (11 °C) above temperature limit: | 1% (2%)          |

\* Above 5,000 feet, contact Cummins for derate information.

## Fire pump digital panel (FPDP)



The Cummins FPDP is an integrated microprocessor-based control system that provides full digital technology with enhanced accuracy and built-in redundancy.

**Reliable design** - Designed and tested with isolated mounting to minimize vibration for longer life and durability, the Cummins FPDP proves reliable in harsh environments.

**Advanced control methodology** - The Cummins FPDP allows for Input/Output (I/O) expansion and remote monitoring capabilities, as well as automatic Electronic Control Module (ECM) switching for electronic engines.

**Certified quality** - The Cummins FPDP is UL 1247 Listed and FM 1333 Approved.

### Operator panel features

#### Operator/display panel

- 7" TFT LCD (thin-film-transistor liquid-crystal display) - color, 24-bit, 800x480 (WVGA).
- Auto, manual, start, stop, and fault reset.
- Assembly enclosure that meets NEMA Type 2 and Type 4X design requirements and is water, corrosion, fire, and impact-resistant.

#### Electronic engine communications - SAE J1939 protocol.

- Comprehensive full-authority engine (FAE) data: oil pressure and temperature; coolant temperature; and intake manifold pressure and temperature.
- Cummins fault code display.
- Sensor failure indication.
- Optional RS-485 serial - Modbus RTU/Modbus TCP/IP.

#### Other control features

- Digital Panel Expansion Module (DPEM) for additional analog/digital inputs and configurable dry relay contact output.
- Ability to idle at start-up for commissioning of electronic engines.
- Idle cool down for electronic engines.

### Functional

- Configurable display units for temperature in degrees Fahrenheit or Celsius and pressure in PSI or kPa.
- Manual ECM selector switch on electronic engines.
- Ability to crank the fire pump drive engine from Battery A, Battery B, or both.
- Fixed engine speed adjustments in +/- 10 RPM increments.
- Overspeed shutdown.

### Environmental



- Operating temperature: minus 4 to 140 °F (minus 20 to 60 °C).
- Storage temperature: minus 22 to 176 °F (minus 30 to 80 °C).
- Meets CISPR 11 Class B radiated emissions.

### Electrical

- 8-30 VDC operating voltage.
- Reverse polarity protected.
- Spring cage terminal block interface.
- Built-in dual micro controllers for increased reliability.

### Mechanical

- 1 3/8" pre-cut customer conduit knockout for easy field installation.
- Simplified internal design for efficiency and ease of customer connections.
- 16GA ASTM A366 material - 316 stainless steel optional.
- RAL3001 red powder coat finish.

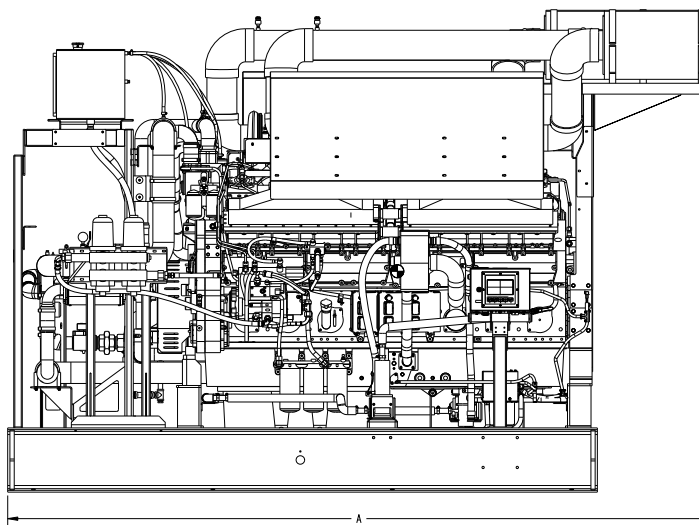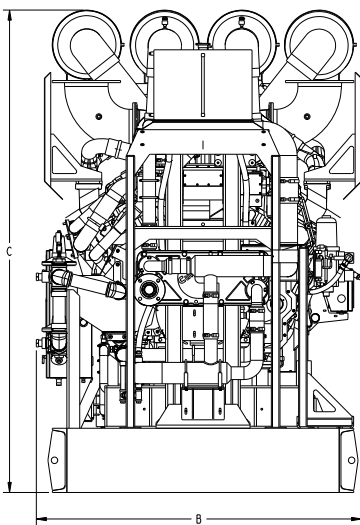

This outline drawing is for reference only.  
Do not use for installation design.

|               | Dim "A"<br>in. (mm) | Dim "B"<br>in. (mm) | Dim "C"<br>in. (mm) |
|---------------|---------------------|---------------------|---------------------|
| <b>CFP60E</b> | 164 (4175)          | 76 (1934)           | 113 (2862)          |

NOTE: Consult drawings or contact the factory for additional information.

NOTE: Specifications are subject to change without notice.  
For more information, contact [firepumpsales@cummins.com](mailto:firepumpsales@cummins.com).

## ISO 9001:2015

This product has been manufactured under the controls established by an approved management system that conforms with ISO 9001:2015.



Cummins Inc.  
Box 3005  
Columbus, IN 47202-3005  
U.S.A.

1-800-CUMMINS™ (1-800-286-6467)  
[cummins.com](http://cummins.com)

Printed in U.S.A.  
©2022 Cummins Inc.